

SPD515SUK

Product Family	Dishwasher
Subfamily	Undercounter Dishwasher
Basket dimensions	500x500 mm
Default power supply	230 V~ / 20 A / 5 kW /50 Hz
Dual Heating function	Yes
Width	600 mm
Depth	600 mm
Height	820 mm
Depth with door open	1020 mm
Usable load height	415 mm



Target

Potential users	Bars/Cafes; Hotels; Offices; QSR
-----------------	-------------------------------------

Aesthetics

Series	Topline	Led colour	Green
Control Panel	Electronic		

Functions



Functions	GN 1/1 trays washing; Triple filter; HTR; Door clearance 415mm
-----------	--

Programmes

Programs

Boiler 85°C/Tank 60°C-60"	Boiler 71°C/Tank 60°C-1'20"	Boiler 85°C/Tank 60°C-1'10"
Boiler 85°C/Tank 60°C-1'30"	Boiler 85°C/Tank 60°C-3'	Boiler 71°C/Tank 60°C-2'10"
Boiler 85°C/Tank 60°C-4'10"		

Drain and self cleaning cycle	Yes
Maximum baskets/hour	60
Maximum plates/hour	1080

Interface

Panel	Easyline 2016	Low rinse aid alert	Yes
Display	8 digit	Low detergent alert	Yes
Number of buttons	5	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Salt light indicator	Yes	Manual diagnostics	Yes

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Tank construction	Double skinned	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Wash tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6 l
Door	Double skinned	Noise level	Lpa 56,5 dBA
Counter balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Net weight (kg)	63,000 kg
Wash arm	Stainless steel AISI 304	Adjustable feet	0-15 mm
Rinse arm	Stainless steel AISI 304	Drain max. height	600 mm

Consumption and connections

Tank heating element	2000 W	Water consumption per cycle	3,2 l
Boiler heating element	6100 W	Warm water connection	Cold 15°C
Wash pump	700 W	Inlet water maximum temperature	60°C
Default connection	5000 W	Max water hardness	12°FH - 7°dH
Electrical connection options	230 V~ / 20 A / 4,5 kW / 50 Hz (NC)	Water inlet pressure	1-6 bar / 100-600 kPa

Electrical Connection

Plug	Not present
-------------	-------------

Manuals and Certifications

Certificate	CE, UKCA, KIWA
--------------------	----------------


Equipment

Peristaltic detergent pump	Yes, electronic control	Chemical dosing	gr/lt
-----------------------------------	-------------------------	------------------------	-------

Detergent (red) hose length	Yes, manual	Drain pump with 3 stage filter system	Yes
Integral continuous water softener	Yes	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Peristaltic rinse aid pump	Yes, electronic control	Break tank	Yes
Detergent flow rate	1.5 l/h	Partial water exchange in the wash tank via built-in drain pump	Yes
Rinse aid (blue) hose length	Yes, manual	Water supply pipe diameter	16 mm
Soft Start	Yes	Drain supply pipe diameter	21.5 mm
Boiler thermostop	Yes	Automatic start	Yes
Wash tank thermostop	Deep drawn	Chemical level probe	Yes, optional KITSONLIV
Cycle counter	Yes	1/1GN tray washing option	Yes

Accessories Included

Plate basket	PB50D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS02	Drain pipe	Yes - 2m
Flat basket	PB50G01		

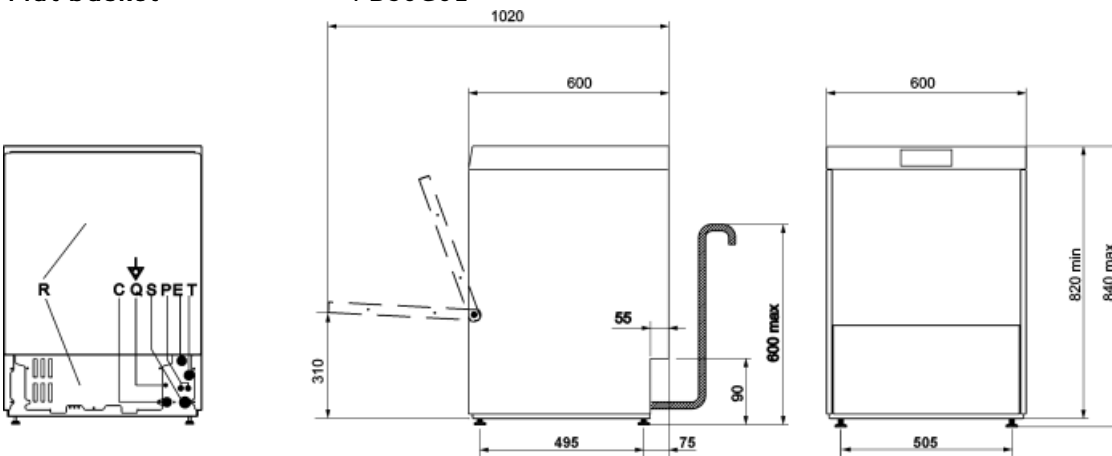

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Symbols glossary



Suitable for 1/1GN trays



HTR rinsing system



Triple filter



Max. usable height 415mm